

(43) International Publication Date  
25 August 2005 (25.08.2005)

PCT

(10) International Publication Number  
WO 2005/079101 A1(51) International Patent Classification<sup>7</sup>: H04Q 7/38,  
H04L 12/56(21) International Application Number:  
PCT/SE2004/001977(22) International Filing Date:  
22 December 2004 (22.12.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
0400339-8 11 February 2004 (11.02.2004) SE(71) Applicant (for all designated States except US): TELE-  
FONAKTIEBOLAGET LM ERICSSON (PUBL)  
[SE/SE]; S-164 83 Stockholm (SE).


(72) Inventors: and

(75) Inventors/Applicants (for US only): SAGNE, Jacques


[FR/FR]; Labesque, F-31310 Montesquieu Volvestre (FR).  
EDLUND, Peter, Hans [SE/SE]; Kassmyravägen 18,  
S-147 33 Tumba (SE). BERSTRÖM, Joakim, Karl, Olof  
[SE/SE]; Eriksbergsgatan 42, S-114 30 Stockholm (SE).(74) Agent: SÄFSTEN, Karin, et al; Bergenstråhle & Lindvall  
AB, Box 17704, S-118 93 Stockholm (SE).(81) Designated States (unless otherwise indicated, for every  
kind of national protection available): AE, AG, AI, AM,  
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,  
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,  
GB, GD, GE, GH, GM, GR, HU, IL, IN, IS, JP, KE,  
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,  
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,  
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,  
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,  
ZW.(84) Designated States (unless otherwise indicated, for every  
kind of regional protection available): ARIPO (BW, GH,

[Continued on next page])

(54) Title: MOBILITY HANDLING

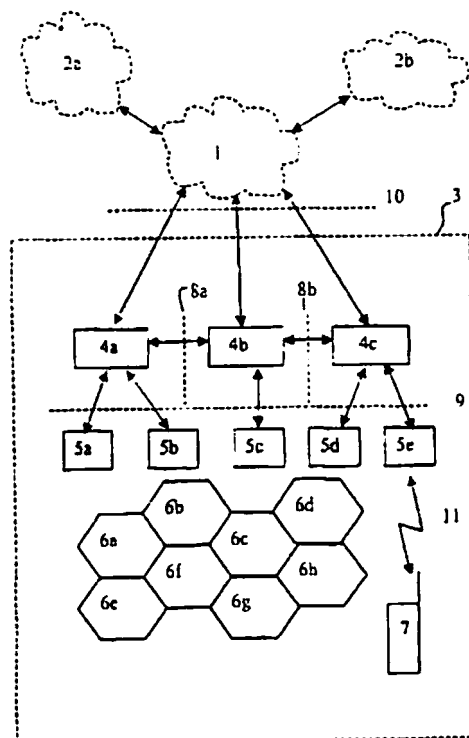

(57) Abstract: The invention relates to an improved mobility handling within a radio access network (3) of an MBMS-joined mobile terminal (7) in a state in which the location of the mobile terminal is stored only at cell group (e.g. URA) level, e.g. a URA\_PCH state. A context information transfer is performed at certain trigger events via the Iur-interface (8a, 8b) between a serving radio network controller (SRNC) and all potential drift radio network controllers (DRNCs) for the mobile terminal.



GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*